


SARGENT AND GREENLEAF®

A Subsidiary of Stanley Security Solutions, Inc.

4200 and 4400 Series Safe Deposit Locks

- All locks on this page are Listed by Underwriters Laboratories under Standard 437.
- The 4200 and 4400 family of safe deposit locks represent an industry standard trusted by financial institutions worldwide for over 80 years.
- Factory matchwork is available upon request to match many manufacturers' guard keys, provided a sample of the guard key is made available to us.
- The pick resistant lever design also resists advanced decoding techniques.
- S&G® safe deposit locks are all key retaining for added security in daily operations.
- Two renter keys are provided with each lock. Renter sides are keyed different. Guard keys are not provided.
- All locks on this page have brass plated covers and plugs.
- The 4444 lock is designed as the primary lock for B and C-rate depository safes and for inner compartment doors. It incorporates special burglary resistant features. Its bolt is drilled and tapped for an 8-32 machine screw to accommodate boltwork attachment.

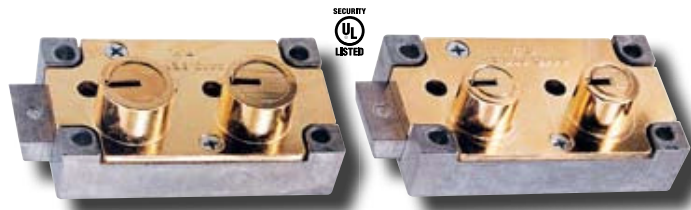


4200 Series


Order Number	Lock Style	Renter Nose Diameter	Guard Nose Diameter	Hand of Lock	Nose Height	Guard Setting
4231-002	4231	.672" (17 mm)	.672" (17 mm)	left-hand	0.5" (12.7 mm)	SY3
4231-008	4231	.672" (17 mm)	.672" (17 mm)	right-hand	0.5" (12.7 mm)	SY3
4420-010	4420	.672" (17 mm)	.672" (17 mm)	left-hand	0.5" (12.7 mm)	#4
4420-042	4420	.672" (17 mm)	.672" (17 mm)	right-hand	0.5" (12.7 mm)	#4

4400 Series


Order Number	Lock Style	Renter Nose Diameter	Guard Nose Diameter	Hand of Lock	Nose Height	Guard Setting
4440-018	4440	.672" (17 mm)	.672" (17 mm)	left-hand	0.5" (12.7 mm)	#4
4440-070	4440	.672" (17 mm)	.672" (17 mm)	right-hand	0.5" (12.7 mm)	#4
4442-004	4442	.840" (21,3 mm)	.672" (17 mm)	left-hand	0.5" (12,7 mm)	#4
4442-014	4442	.840" (21,3 mm)	.672" (17 mm)	right-hand	0.5" (12,7 mm)	#4
4443-008	4443	.840" (21,3 mm)	.840" (21,3 mm)	left-hand	0.5" (12,7 mm)	#4
4443-028	4443	.840" (21,3 mm)	.840" (21,3 mm)	right-hand	0.5" (12,7 mm)	#4
4444-002	4444	.672" (17 mm)	.672" (17 mm)	right-hand only	0.5" (12,7 mm)	#4

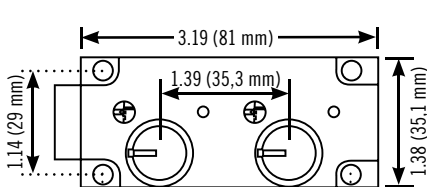

4420—designed for matchwork to all Corbin guard keys (RH model shown here)

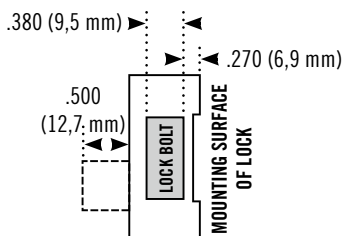

All locks on this page (with the exception of the 4444) have an extended bolt length of .40" (10,2 mm), with a bolt throw of .31" (7,9 mm).

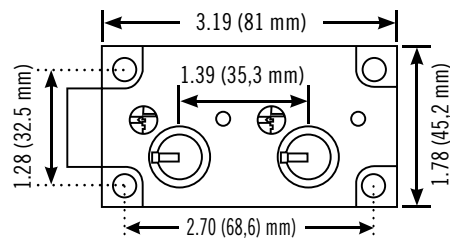

4440—a standard of the safe deposit industry since 1922

These dimensions also apply to:

- 4231—designed for matchwork to the Yale SY3 guard key
- 4442—designed for matchwork to the Diebold 175 series
- 4443—designed for matchwork to the Mosler 5700 series