

SARGENT AND GREENLEAF®

A Subsidiary of Stanley Security Solutions, Inc.

Key-Op® Key Operated Safe Lock




6804-008 Guide Tube—Fits into a matching recess in the front of the lock case, and extends to the back of the key hole escutcheon. It is meant to guide the key into the lock, and is suitable for thick doors and insulated doors. Tube length is 1 meter, and can easily be cut to length.

6804-033 Buffed chrome hinged cover keyhole escutcheon



6804-009 Satin nickel finish self-stick keyhole escutcheon

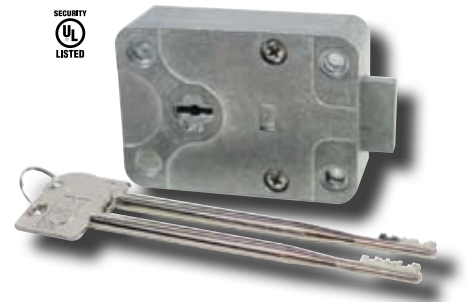

- Underwriters Laboratories Listed under Standard 437 as a Security Container Lock.
- Available in single and double bitted key versions.
- Same mounting footprint as S&G® standard size combination locks, with the key hole in the same place as the spindle hole. Key hole through the safe door must be at least 9/16" (14,3 mm) in diameter.
- Keys are nickel plated brass for durability and long life.


Key-Op Locks with Keys

Order Number	Key Retention	Key Style	Notes
6804-049	key retaining	single bitted	includes (2) keys and (1) 6804-009 escutcheon
6824-005	key retaining	double bitted	includes (2) keys and (1) 6804-009 escutcheon
6805-005	non-key retaining	single bitted	includes (2) keys and (1) 6804-009 escutcheon
6825-005	non-key retaining	double bitted	includes (2) keys and (1) 6804-009 escutcheon

Key-Op Key Blanks and Pre-Cut Keys

Order Number	Description	Keys per Package	Notes
6804-019	uncut key blank	1	single bit, for 3" (76,2 mm) max. door thickness
6804-017	pre-cut keys	2	single bit, for 3" (76,2 mm) max. door thickness
6804-018	pre-cut keys	3	single bit, for 3" (76,2 mm) max. door thickness
6824-017	uncut key blank	25	double bit, for 3" (76,2 mm) max. door thickness
6824-016	pre-cut keys	2	double bit, for 3" (76,2 mm) max. door thickness

Safe Handle

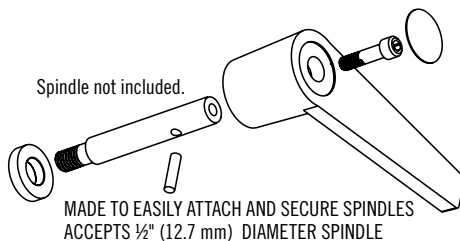

S&G® Satin Chrome Safe Handle

Order Number	Finish	Notes
2629-010	satin chrome	1/2" (12,7 mm) pilot hole for handle shaft