

SARGENT AND GREENLEAF®

A Subsidiary of Stanley Security Solutions, Inc.

Group 2 Mechanical Safe Locks

- 6730 Series: Underwriters Laboratories Listed Group 2, VdS Class 1, CEN A, China CCC.
- The 6730 Series is widely recognized as the standard Group 2 lock of the industry.
- 6731 Series: U.L. Listed Group 2, VdS Class 2, CEN B, China CCC, RoHS compliant.
- Three brass and aluminum wheels provide 1,000,000 theoretical combinations. The four-wheel 6731 model offers 100,000,000 theoretical combinations.
- Made to outperform other locks in the most demanding commercial applications.
- Internal relock trigger secures the lock in the event of a burglar's punch attack.
- 4-way drive cam for mounting right-hand, left-hand, vertical-up, or vertical-down.
- Accepts a wide variety of dials in several attractive finishes (see page 21).
- The 6738 models are switch locks, offering duress and lever position switches, depending on the model ordered.




Lock Bodies (only)

Order Number	No. of Wheels	Notes
6730-010	3	standard lock bolt
6730-053	3	metric bolt with (2) 4 mm-7 drilled and tapped holes
6738-003	3	standard bolt and duress switch
6738-005	3	standard bolt, duress switch, and lever position switch
6731-004	4	standard bolt

Locks, Dials & Rings

Order Number	No. of Wheels	Notes
6730-100	3	standard bolt, D300/R211 front reading B&W dial and ring
6730-101	3	standard bolt, D003/R004 front reading B&W dial and ring
6730-103	3	standard bolt, D690 front reading, key locking B&W dial and ring
6730-102	3	standard bolt, D220 Spy-Proof® B&W dial and ring
6730-112	3	standard bolt, D225 Spy-Proof®, key locking B&W dial and ring
6731-111	4	standard bolt, D225 Spy-Proof®, key locking B&W dial and ring
6731-112	4	standard bolt, D300/R211 front reading B&W dial and ring

- 6741 Series: Underwriters Laboratories Listed Group 2, CEN A, VdS Class 1, CNPP A2P A/E RoHS compliant.
- 6748 Series: Underwriters Laboratories Listed Group 2, CNPP A2P A, RoHS compliant.
- Three die cast Zamak and aluminum wheels provide 1,000,000 theoretical combinations.
- Die cast push-pull lever with wider dialing tolerances makes the lock easy to dial and less sensitive to bolt side and end pressure than standard levers.
- Designed and constructed to provide a high level of security at a moderate cost.
- Internal relock trigger secures the lock in the event of a burglar's punch attack.
- Four-way drive cam for mounting right-hand, left-hand, vertical-up, or vertical-down.
- Accepts a wide variety of dials in several attractive finishes (see page 21).
- The 6748 lock is a dual switch lock, providing switch contacts to open or close a relay circuit when a duress combination is dialed and when the lever drops into position for opening the lock.

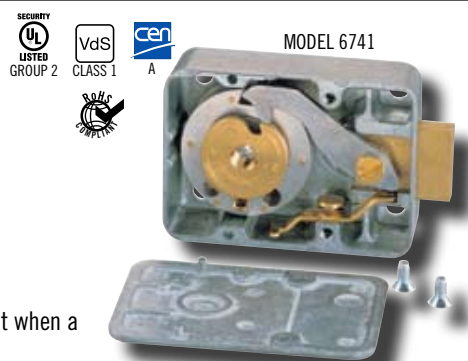

Lock Bodies (only)

Order Number	Number of Wheels	Notes
6741-002	3	standard lock bolt
6741-001	3	metric bolt with (2) 4 mm-7 drilled and tapped holes
6748-013	3	standard bolt, duress switch, lever position switches, M6 mounting screws

Locks, Dials and Rings



Order Number	Number of Wheels	Notes
6741-106	3	standard bolt, D300 front reading B&W dial and ring
6741-107	3	standard bolt, D003 front reading B&W dial and ring
6741-108	3	standard bolt, D220 Spy-Proof® B&W dial and ring
6741-109	3	standard bolt, D690 front reading, key locking B&W dial and ring
6741-110	3	standard bolt, D225 Spy-Proof® B&W dial and ring